



FU IBERICA, s.l.
TRANSMISIÓN DE POTENCIA

Tel. +34 932 681 833 · Fax +34 932 683 292
www.fuiberica.com · fuiberica@fuiberica.com

////// ZERO-MAX®

V47 Composite Disc Coupling Solution





ZERO-MAX®




CD® Composite Disc **V47** Wind Turbine Coupling

Zero Max Composite Disc Wind Turbine Couplings are designed to exceed the typical operational life of a normal driveline coupling. This model will directly interchange with the original high speed shaft coupling.

Zero-Max has designed and manufactured driveline couplings for industry since 1984. Today, Zero-Max is a trusted and approved driveline coupling supplier to Wind Turbine Manufacturers around the globe.

We understand the special requirements for this unique industry.

- Lower Life Cycle Cost (LCC)
- Composite material is designed and tested to withstand a wide range of environmental conditions
- Fully tested and refined to handle loads beyond the needs of the application
- Lightweight design for easy installation – drops in between the existing flanges
- Repeatable consistent quality
- Suitable for use in turbines that are operating in areas with difficult power grid conditions
- Maintenance free

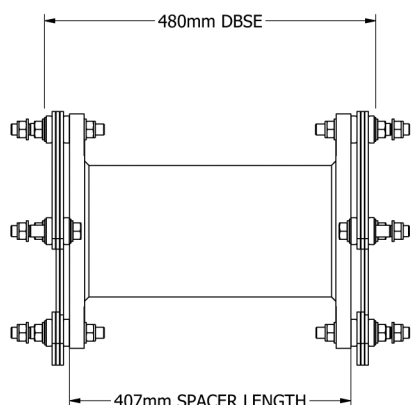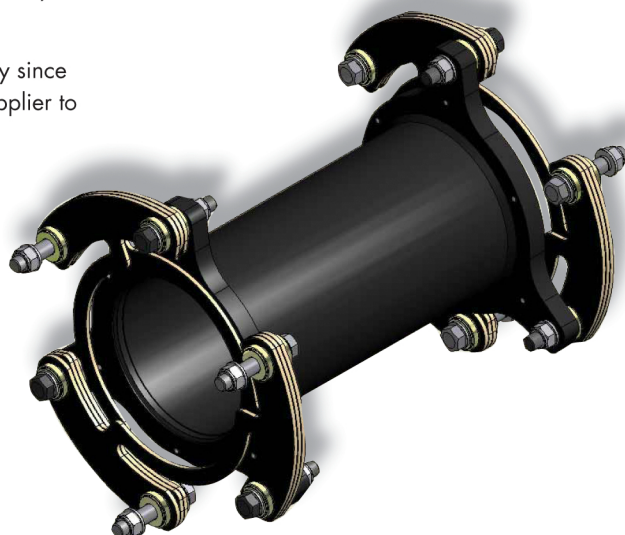

Performance Information

Continuous Torque Rating	5,000 Nm
Peak Torque Rating	10,000 Nm
Torsional Stiffness	9,768 Nm /Degree
Axial Stiffness	138 N / mm
Maximum Parallel Misalignment	11.5mm
Maximum Angular Misalignment	1.5 Degrees
Maximum Axial Displacement	5mm

